





## The Latest Advance in Thermal Pain Stimulation

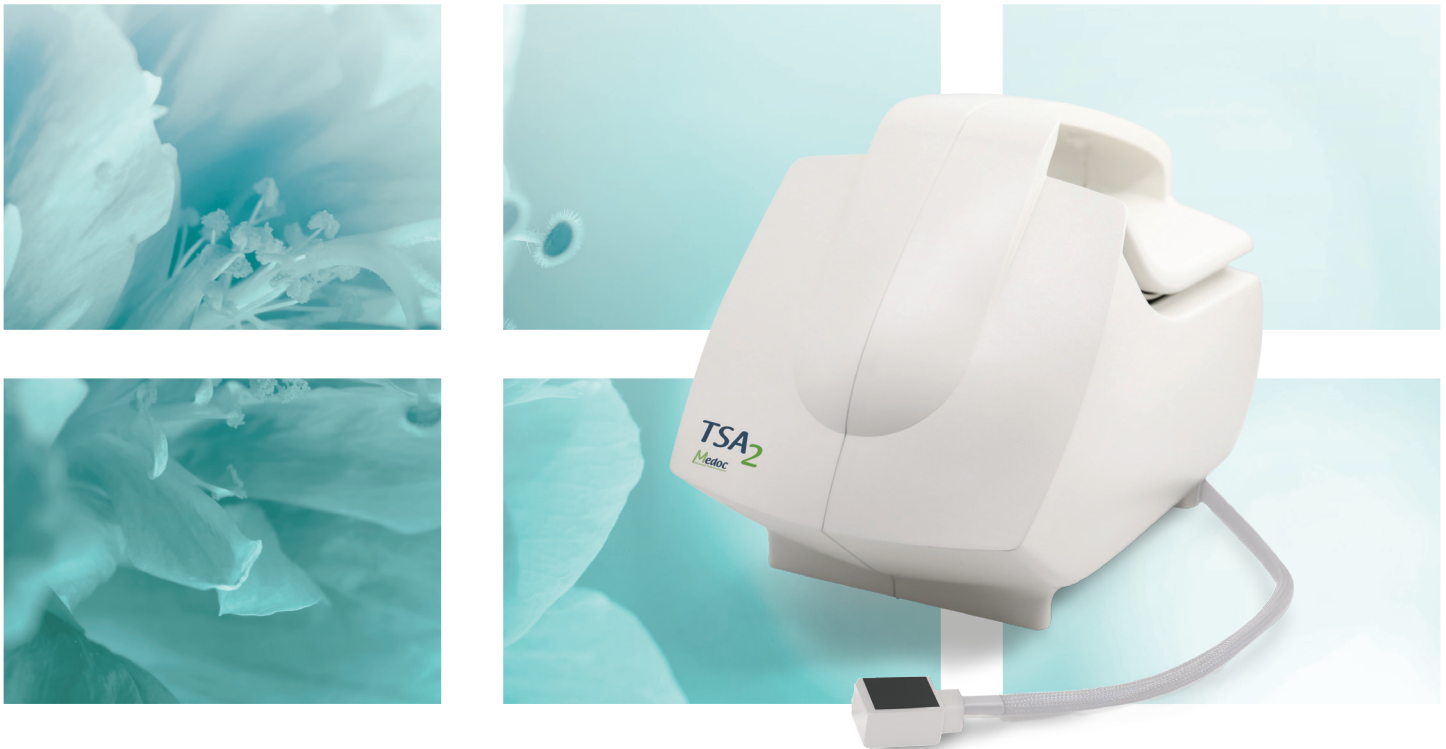


- Precise stimulation temperature control
- External Control programming capability
- Rapid thermal stimulation rates- up to 13°C/sec
- Single and Dual Thermode configurations
- Upgradeable for the fMRI imaging environment

## Control, Precision, and Dependability for your Research Needs


- ✓ Develop dynamic protocols using MATLAB® and similar platforms
- ✓ EEPROM embedded thermode for calibration monitoring
- ✓ Dual thermode model to facilitate CPM and other advanced protocols
- ✓ Fifteen years of advancements in meeting fMRI Imaging needs
- ✓ Thermode configurations for 30x30mm, 16x16mm, intra-oral, intra-vaginal and fMRI

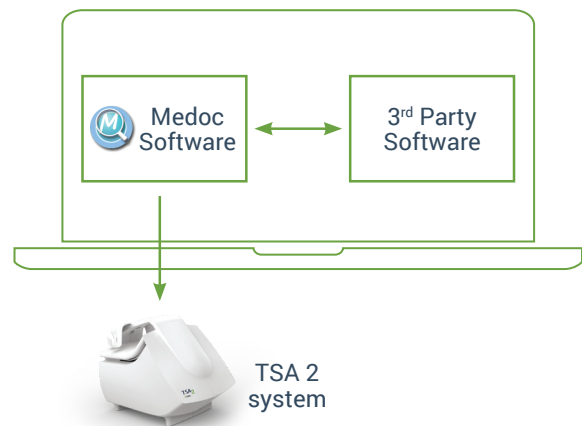

Dynamic protocols delivered through external control

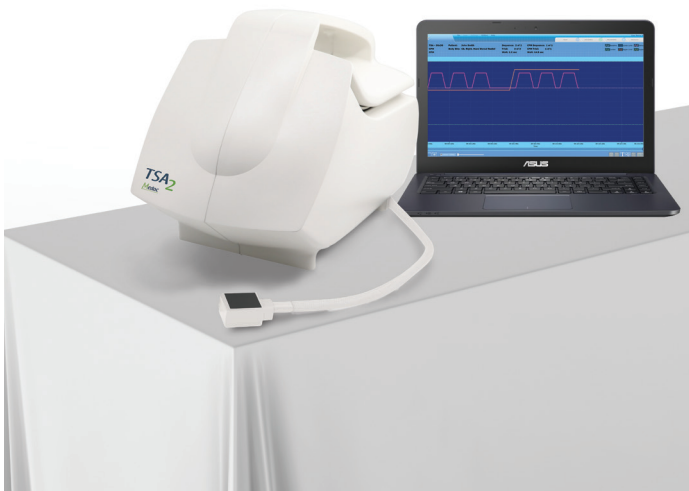

CPM protocol based on dual thermode configuration

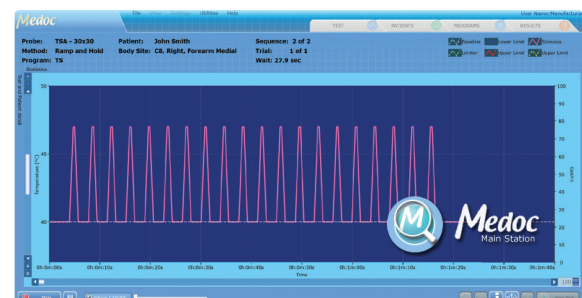

Evaluation of Temporal Summation